

SE1595


Standard



MEDIA
MEASURED
LIQUIDS



PIPE DIAMETER
FROM DN 80
TO DN 4500

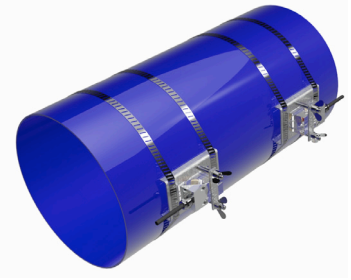

SALES DESCRIPTION

- External probes for liquid flow measurement on a full pipe
- Standard applications - clear liquids and piping in good conditions
- Mounting on a pipe from DN80 to DN4500
- Maximum operating temperature of 80°C
- Potted cable through cable gland

INSTALLATION

Non intrusive

APPLICATION

Full pipe

CONDITIONS OF USE

Clear liquids, piping in good conditions

PIPE DIAMETER

Recommended probe range : 100 - 3000 mm
Extended probe range : 80 - 4500 mm (requires an 8XX converter)

THICKNESS OF THE PIPE

> 1 mm

CONNECTIC

Potted cable through cable gland

MOUNTING TYPE

/, V, N, W

TEMPERATURE

From -20°C to +80°C

LIST OF ADAPTABLE SUPPORTS

SU1625, SU1629, SU4245, SU1673

COMPATIBLE CONVERTERS

ALL

ATEX CERTIFICATION

NO

INGRESS PROTECTION

EN/IEC 60529 IP68

PROBE MATERIAL

Plexiglass

OVERALL SIZE

70 x 40 x 44 mm

OVERALL WEIGHT

175 g

SENSOR FREQUENCY

500 kHz

NON CONTRACTUAL DOCUMENT