


KIT SE 1899


High performance



MEASURED
MEDIA
LIQUIDS &
GASES*



PIPE DIAMETER
FROM DN 100
UP TO DN 7500
EXTENDED APP. UP TO 10000mm

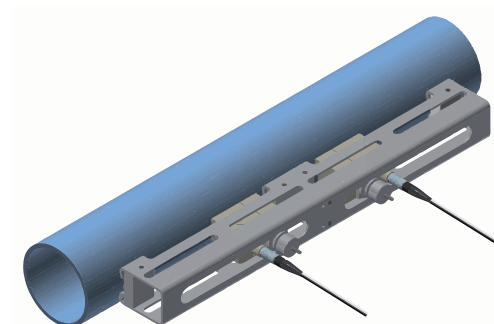

SALES DESCRIPTION

INSTALLATION

- Clamp-on probes for full pipes flow measurement
- Microstructure sensor for difficult applications.
- Mounting on pipe from DN100 to DN7500 (Extended application: 10000 mm)
- Maximum operating temperature 110°C
- Push-Pull connection

APPLICATION

Non intrusive

CONDITIONS OF USE

Full pipe

* GAS APPLICATION

Difficult - Clear or charged liquids- cleaner dirty pipes

PIPE DIAMETER

Ask Ultraflux for application conditions compatibility

PIPE THICKNESS

Standard application : 100 - 7500 mm

Extended application : Up to 10000 mm - Please consult us

CONNECTIC

> 1 mm

Push-Pull connection

MOUNTING TYPE

/, V, N, W

TEMPERATURE

From -20°C to +110°C

MOUNTING BRACKETS

Included

COMPATIBLE CONVERTERS

All

ATEX CERTIFICATION

No

INGRESS PROTECTION

EN/IEC 60529 IP 67

PROBE MATERIAL

PEEK

OVERALL DIMENSIONS

500 x 50 x 100 mm

OVERALL WEIGHT

1280 g

SENSOR FREQUENCY

500 kHz

NON-CONTRACTUAL DOCUMENT